

AI



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01L 21/00, G05B 19/418		A1	(11) International Publication Number: WO 98/57358
(21) International Application Number: PCT/US98/11320		(43) International Publication Date: 17 December 1998 (17.12.98)	
(22) International Filing Date: 8 June 1998 (08.06.98)		(81) Designated States: JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(30) Priority Data: 08/871,746 9 June 1997 (09.06.97) US		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(71) Applicant: APPLIED MATERIALS, INC. [US/US]; 3050 Bowers Avenue, Santa Clara, CA 95054 (US).			
(72) Inventor: JEVTIC, Dusan; 444 Saratoga Avenue #34B, Santa Clara, CA 95050 (US).			
(74) Agents: MOSER, Raymond, R., Jr. et al.; Applied Materials, Inc., P.O. Box 450A, Santa Clara, CA 95052 (US).			

(54) Title: METHOD AND APPARATUS FOR AUTOMATICALLY GENERATING SCHEDULES FOR WAFER PROCESSING WITHIN A MULTICHAMBER SEMICONDUCTOR WAFER PROCESSING TOOL

(57) Abstract

A method and apparatus for producing schedules for a wafer in a multichamber semiconductor wafer processing tool comprising the steps of providing a trace defining a series of chambers that are visited by a wafer as the wafer is processed by the tool; initializing a sequence generator with a value of a variable defining initial wafer positioning within the tool; generating all successor variables for the initial variable value to produce a series of values of the variable that represent a partial schedule; backtracking through the series of variables to produce further partial schedules; and stopping the backtracking when all possible variable combinations are produced that represent all possible valid schedules for the trace. All the possible schedules; are analyzed to determine a schedule that produces the highest throughput of all the schedules.

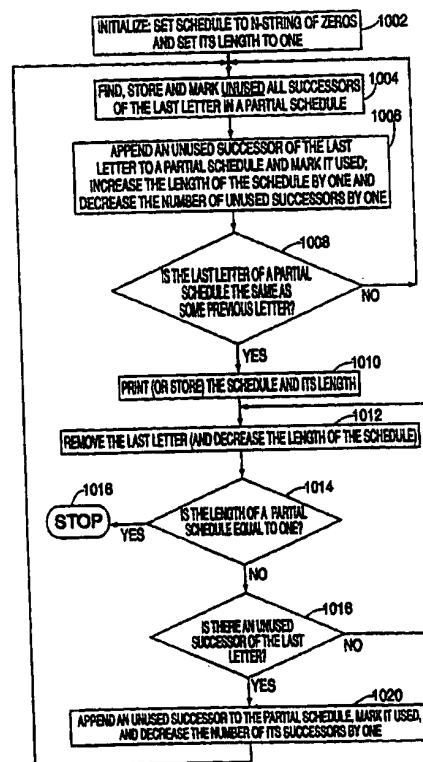

1A

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

**METHOD AND APPARATUS FOR AUTOMATICALLY GENERATING
SCHEDULES FOR WAFER PROCESSING WITHIN A MULTICHAMBER
SEMICONDUCTOR WAFER PROCESSING TOOL**

5 BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a multiple chamber wafer processing tool and, more particularly, to a method and apparatus for automatically generating a schedule(s) for
10 a semiconductor wafer within a multiple chamber semiconductor wafer processing tool.

2. Description of the Background Art

Semiconductor wafers are processed to produce
15 integrated circuits using a plurality of sequential process steps. These steps are performed using a plurality of process chambers. An assemblage of process chambers served by a wafer transport robot is known as a multiple chamber semiconductor wafer processing tool or cluster tool. FIG. 1
20 depicts, in part, a schematic diagram of an illustrative cluster tool known as the Endura® System manufactured by Applied Materials, Inc. of Santa Clara, California.

The cluster tool 100 contains, for example, four process chambers 104, 106, 108, 110, a transfer chamber 112,
25 a preclean chamber 114, a buffer chamber 116, a wafer orienter/degas chamber 118, a cooldown chamber 102, and a pair of loadlock chambers 120 and 122. Each chamber represents a different stage or phase of semiconductor wafer processing. The buffer chamber 116 is centrally located
30 with respect to the loadlock chambers 120 and 122, the wafer orienter/degas chamber 118, the preclean chamber 114 and the cooldown chamber 102. To effectuate wafer transfer amongst these chambers, the buffer chamber 116 contains a first robotic transfer mechanism 124. The wafers 128 are
35 typically carried from storage to the system in a plastic transport cassette 126 that is placed within one of the loadlock chambers 120 or 122. The robotic transport mechanism 124 transports the wafers 128, one at a time, from the cassette 126 to any of the three chambers 118, 102, or

114. Typically, a given wafer is first placed in the wafer orienter/degas chamber 118, then moved to the preclean chamber 114. The cooldown chamber 102 is generally not used until after the wafer is processed within the process chambers 104, 106, 108, 110. Individual wafers are carried upon a wafer transport blade 130 that is located at the distal end of the first robotic mechanism 124. The transport operation is controlled by a sequencer 136.

The transfer chamber 112 is surrounded by and has access to the four process chambers 104, 106, 108 and 110 as well as the preclean chamber 114 and the cooldown chamber 102. To effectuate transport of a wafer amongst the chambers, the transfer chamber 112 contains a second robotic transport mechanism 132. The mechanism 132 has a wafer transport blade 134 attached to its distal end for carrying the individual wafers. In operation, the wafer transport blade 134 of the second transport mechanism 132 retrieves a wafer from the preclean chamber 114 and carries that wafer to the first stage of processing, for example, a physical vapor deposition (PVD) stage within chamber 104. Once the wafer is processed and the PVD stage deposits material upon the wafer, the wafer can then be moved to a second stage of processing and so on.

Once processing is complete within the process chambers, the transport mechanism 132 moves the wafer from the process chamber and transports the wafer to the cooldown chamber 102. The wafer is then removed from the cooldown chamber using the first transport mechanism 124 within the buffer chamber 116. Lastly, the wafer is placed in the transport cassette 126 within the loadlock chamber 122.

More generally, a cluster tool contains n chambers, denoted by C_1, C_2, \dots, C_n , one or more transfer chambers (robots) 112 and 116, and one or more loadlocks 120 and 122. The exact arrangement of chambers, robots and loadlocks is referred to as the "configuration" of the tool. A wafer W_i to be processed is taken from a loadlock, placed successively into various chambers as each chamber performs a particular process upon the wafer.

A wafer's trace is the trajectory of a particular wafer through the cluster tool; that is, a trace is the order in which chambers are visited by a wafer (not necessarily C_{i+1} after C_i). This should be distinguished from the term

5 "processing sequence" which is the order of applying processes (recipes) to a wafer. If more than one chamber performs the same process (parallel chambers), a given processing sequence may be satisfied by several different traces.

10 A wafer which completes its processing sequence and is returned to the loadlock is said to be processed by the tool. Roughly speaking, a tool's throughput is the number of wafers processed by the tool per unit of time. That is, if the tool needs t seconds to process n_t wafers, then

$$15 \quad S_t := \frac{n_t}{t} \quad (3)$$

is the tool's throughput measured in the interval $[0, t]$.

There are many ways to improve the tool's throughput for a given processing sequence. However, one important improvement is to use efficient scheduling routines for a

20 given processing sequence.

The optimization of scheduling involves the choice of criteria used in deciding when to transfer a wafer from one chamber into the next (and which wafers should be moved, if any, prior to that move). A routine which schedules the

25 movement of wafers through the cluster tool (based on a given processing sequence) is referred to as a "scheduling routine."

The steady-state throughput of a tool under scheduling routine A is denoted by $S(A)$. If $n > 1$ then, depending on a

30 given processing sequence, one may consider a number of scheduling routines that fulfill the processing sequence. The routine which maximizes the value of throughput is deemed the "optimum" routine and the maximum attainable value of throughput is known as the tool's "capacity." That

35 is, if A is the set of all possible scheduling routines for a given processing sequence, then A^* is optimum if

$$S(A^*) = \max\{S(A) \mid A \in A\} \quad (4)$$

Clearly, the tool's capacity $S(A^*)$ depends on a given processing sequence as well as on chamber and robot parameters within the processing sequence. The problem of finding efficient scheduling routines for a given processing sequence (especially, finding optimum routines, where possible) is of considerable practical importance.

Presently there is not an automatic method of determining the best schedule, given a particular trace, that provides the highest throughput for that trace. Typically, a trial and error method is used until a schedule is determined that provides a sufficient throughput. However, the sufficient throughput may not be the best throughput that is possible for a given trace.

Therefore, a need exists in the art for a method and apparatus that determines all possible schedules given a particular trace and, using a throughput modeling program determines the throughput for each of the possible schedules and selects a schedule for use within a cluster tool that provides the maximum throughput for the given trace.

SUMMARY OF THE INVENTION

The disadvantages heretofore associated with the prior art are overcome by an invention of a method and apparatus for determining all possible schedules that accomplish a given trace, applying a throughput model to each of the schedules, and determining the schedule or schedules that result in the highest throughput.

More specifically, the invention uses a set of deterministic rules to compute the various schedules. First, a schedule is defined as a series of "letters" that form a "word". Each letter in the word defines a possible positioning of wafers within a cluster tool. Of course, the positioning of the wafers within the tool must fulfill the trace, i.e., each letter must follow from a predecessor letter in accordance with a particular set of rules that define the trace.

Given a letter (input letter) representing present wafer positions, the invention computes all possible successor wafer positions, i.e., all possible valid

successor letters, as well as the total number of successors for the input letter. The invention provides individual "modules" for successor computation for serial traces, parallel traces, and mixed traces. Using a backtracking technique to repeatedly compute, from any letter, all possible successor letters, and then compute all possible successor letters of the successor letters, a schedule tree is derived. The schedule tree contains all possible schedules that will fulfill a given trace. Each and every schedule can then be modeled to determine the expected throughput of each schedule. By comparing the throughput associated with each schedule, an optimal schedule or schedules is identified.

15 BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

Fig. 1 depicts a schematic diagram of a multiple chamber semiconductor wafer processing tool being controlled by a sequencer that operates using scheduling routines generated by a schedule generator in accordance with the present invention;

Fig. 2 depicts block diagram of schedule generator that performs operative steps in accordance with the present invention;

Fig. 3 depicts a flow diagram of a 4-chamber serial trace;

Fig. 4 depicts a flow diagram of a 4-chamber mixed trace;

Fig. 5 depicts a flow diagram of a schedule optimization routine of the present invention;

Fig. 6 depicts a tree diagram representing all possible schedules for a 2-chamber serial trace;

FIG. 6A depicts a schematic diagram of a 2-chamber serial trace of FIG. 6 showing a wafer in position (1,0);

Fig. 7 depicts a tree diagram representing all possible schedules for a 3-chamber serial trace;

FIG. 7A depicts a schematic diagram of a 3-chamber serial trace of FIG. 7 showing a wafer in position (0,1,0);

Fig. 8 depicts a tree diagram representing all possible schedules for a trace: $LL-C_1-(C_2,C_3)-LL$;

5 FIG. 8A depicts a schematic diagram of a 3-chamber mixed trace of FIG. 8 showing a wafer in position (1,1,0);

Fig. 9 depicts a tree diagram containing partial schedules as constructed using the present invention; and

Fig. 10 depicts a flow diagram of a routine for producing all possible schedules for a given trace using a backtracking technique.

To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

15

DETAILED DESCRIPTION

A. Overview of the Invention

As discussed above, FIG. 1 depicts, in part, a schematic diagram of a conventional multiple chamber semiconductor wafer processing tool. The depicted cluster tool 100 is controlled by a sequencer that executes the scheduling routines determined by the present invention. The present invention is embodied in a schedule generator 50 that produces scheduling routines which are executed by the sequencer 136.

25 FIG. 2 depicts a block diagram of the scheduling generator 50 that produces the scheduling routines executed by the sequencer to control the cluster tool 100 of FIG. 1. Additionally, the schedule generator 50 operates to determine an optimal sequencing routine for a given processing sequence and tool configuration. Although, the schedule generator is shown to remotely produce schedules and download one or more schedules to the sequencer, those skilled in the art will understand that the invention could be practiced on a processor within the sequencer.

35 The schedule generator 50 contains a microprocessor 200 as well as memory 202 for storing a schedule generation routine 210, a schedule optimization routine 212 and the scheduling routine(s) generated by routines 210 and 212.

The microprocessor 200 cooperates with conventional support circuitry 206 such as power supplies, clock circuits, cache, and the like as well as circuits that assist in executing the software routines. As such, it is contemplated that
5 some of the process steps discussed herein as software processes may be implemented within hardware, e.g., as circuitry that cooperates with the microprocessor to perform various process steps. The schedule generator 50 also contains input/output circuitry 208 that forms an interface
10 between conventional input/output (I/O) devices 214 such as a keyboard, mouse, and display as well as an interface to the sequencer. Although the schedule generator 50 is depicted as a general purpose computer that is programmed to determine scheduling routines in accordance with the present
15 invention, the invention can be implemented in hardware as an application specific integrated circuit (ASIC). As such, the process steps described herein are intended to be broadly interpreted as being equivalently performed by software, hardware, or a combination thereof.

20 The automatic schedule generator 50 of the present invention executes a schedule generation routine 210 that generates all possible schedules for a given trace. A schedule optimization routine 212 facilitates an automated process of producing an optimum schedule for a given cluster
25 tool using an exhaustive search of all possible schedules.

The following definitions are used throughout this disclosure:

"Tool configuration" describes physical placement of chambers within a cluster tool. For example, the tool may
30 have chambers C_1 , C_2 , C_3 and C_4 , a LoadLock (LL) as well as one or more robots.

"Process sequence" is the order in which processes are applied to a given wafer. For example, P_n is the name of the n-th process (e.g., etch) and, P_1 , P_2 , P_3 , (which also may be
35 written as $P_1 \rightarrow P_2 \rightarrow P_3$) is a process sequence.

"Processing capability" of a cluster tool is the result of mapping a required process sequence onto the set of chambers within the tool. The image of this mapping is

called a "trace". For example, a process sequence $P_1 \rightarrow P_2 \rightarrow P_3$ may be mapped onto four chambers C_1 , C_2 , C_3 and C_4 to yield a trace

5

$$LL \rightarrow C_1 \rightarrow (C_2 \vee C_3) \rightarrow C_4 \rightarrow LL.$$

Note that processes P_1 and P_3 are mapped into chambers C_1 and C_4 , respectively, while process P_2 is mapped into $C_2 \vee C_3$ (the process P_2 is performed in both C_2 and C_3). Chambers C_2 and C_3 are said to be parallel because a wafer visits (is placed into) either C_2 or C_3 (but not both). In other words, the sign \vee in $C_2 \vee C_3$ represents an exclusive OR function.

"Stage" is a set of one or more chambers which correspond to the same process. Wafers visit exactly one chamber from a given stage. The notation $(C_x \vee C_y \vee C_z)$ means that wafers can move to either chambers C_x or C_y or C_z , but only into one of the chambers. That is, $(C_x \vee C_y \vee C_z)$ is a stage comprised of three "parallel" chambers.

Generally speaking, the term "schedule" means a finite and repeatable sequence of wafer and robot movements through the cluster tool. More formally, let S be the set of all possible wafer and robot states. A string of symbols (letters) from a finite set of states S is referred to as a word. Symbols are represented as letters from the alphabet S . For example, if $S = \{0,1\}^2$, then $(0,0)$, $(0,1)$, $(1,0)$, and $(1,1)$ are all possible letters in alphabet S and $(0,1)(1,1)(0,1)$ is a word having a length of 3 letters over S . Each letter identifies the instantaneous state of the tool. For example, as is discussed in detail below, a letter may define the particular positioning of a wafer or wafers within a tool at a particular point in the trace.

Broadly speaking, whatever the specific alphabet, a schedule S is represented as a word,

$$S = xyz \dots uv \dots rtx,$$

which starts and ends with the same letter (e.g., x), this is the only repeated letter, and a successor v of a given letter u must satisfy alphabet dependent rules, i.e., rules which define a valid trace.

5 Traces are available in three different configurations. A trace is a parallel trace if it is comprised of exactly one stage; a trace is a serial trace if each stage has exactly one chamber and a trace is a mixed trace if it is neither serial nor parallel. (Clearly, to have a mixed
10 trace, the number of chambers in the trace is at least three.) A trace is said to be knotted if there is a chamber whose name appears more than once in the trace (that is, the corresponding process sequence contains a processing loop). To illustrate, Figs. 3 and 4 schematically depict 4-stage
15 serial and mixed traces, respectively.

Fig. 5 depicts a high level flow diagram of the schedule optimization routine 212. The optimization routine contains a schedule generation routine 210 that produces all possible schedules in an alphabet induced by a given trace.
20 Routine 212 is an automated process that performs the following steps:

- a) Input a trace L (step 500),
- b) Produce all possible schedules over L (routine 210) using a two step process, where the first step
25 (step 508) generates all possible successor positions (letters) to which a wafer can be moved from a present position (letter) and the second step (step 510) uses a backtracking technique to change wafer positions such that other successor
30 positions (letters) can be computed by step 508,
- c) Evaluate each of the schedules in (b) with respect to throughput (for a given set of robot and process parameters) (step 504),
- d) Record a schedule or a set of schedules which have
35 the highest throughput for the given trace L (step 506).

Since step (c) requires a throughput simulation program, for computational efficiency, steps (a), (b) and (d) are generally incorporated into the simulation program.

A plurality of embodiments of the present invention are discussed below in Sections B, C, D and E of this disclosure. Specifically, the definitions of a schedule in a $\{0,1\}^n$ alphabet, rules for generating successors of a given letter, and modules needed for computation of successors are given in Section B for a serial trace and Section C for mixed and parallel traces. In Section D, these processes are extended to include robot utilization in the computations. Lastly, a generalized backtracking routine for generating all possible schedules from a given trace, applicable to any trace with or without a robot, is presented in Section E.

B. Schedule Generation for Serial Traces

An n -chamber serial trace (as illustratively depicted in FIG. 3), comprised of chambers C_1, C_2, \dots, C_n , is associated with an n -tuple from the alphabet $\{0,1\}^n$. If \bar{x} is such a tuple, then, for $i=1,2,\dots,n$; $\bar{x}[i]=0$, if chamber C_i is empty, and $\bar{x}[i]=1$, if C_i contains a wafer. In accordance with this representation, a schedule S is a finite string of binary n -tuples,

$$S = \bar{x} \dots \bar{u} \bar{v} \dots \bar{x},$$

which starts and ends with the same binary n -tuple and this is the only repeated n -tuple in the string. In addition, any two consecutive n -tuples \bar{u} and \bar{v} in the string, \bar{v} being a successor of \bar{u} , differ in at most two coordinates and are related in accordance with the following rules:

- s₁) If $\bar{u}[1]=0$, then $\bar{v}[1]=1$. For all $k>1$, $\bar{v}[k] = \bar{u}[k]$. (This corresponds to a wafer being moved from the loadlock into C_1 .)
- s₂) If $\bar{u}[n]=1$, then $\bar{v}[n]=0$. For all $k<n$, $\bar{v}[k] = \bar{u}[k]$. (This corresponds to a wafer being moved from C_n into the loadlock).

s_3) If, for some $k \in \{0, n\}$, $\bar{u}[k]=1$ and $\bar{u}[k+1]=0$, then $\bar{v}[k]=0$ and $\bar{v}[k+1]=1$. For all $i \notin \{k, k+1\}$, $\bar{v}[i]=\bar{u}[i]$. (This corresponds to a wafer being moved from C_k into C_{k+1} .)

5 FIG. 6 illustrates all possible schedules available (i.e., two schedules) in a 2-chamber serial trace. FIG. 6A depicts a schematic diagram of the 2-chamber serial trace of FIG. 6 having a wafer in position represented by the 2-tuple $(1,0)$. These n-tuples are referred to herein as the coordinates of
 10 wafer positioning. From position $(1,0)$, the schedule of FIG. 6 dictates that the wafer is next moved to a position represented by the 2-tuple $(0,1)$, i.e., a wafer is now in chamber C_2 and no wafer is in chamber C_1 . Thereafter, the schedule may follow one of two paths, either the wafer in C_2
 15 is moved to the loadlock (a wafer positioning that is represented by 2-tuple $(0,0)$) or another wafer is moved into chamber C_1 (a wafer positioning that is represented by 2-tuple $(1,1)$). As such, each 2-tuple represents a set of possible positions for a wafer or wafers that validly
 20 fulfill a step in the trace.

Similarly, FIG. 7, illustrates the seven possible schedules available in a 3-chamber serial trace and FIG. 7A depicts a schematic diagram of the trace of FIG. 7 having a wafer positioning represented by the 3-tuple $(0,1,0)$. From
 25 Fig. 7, the strings

$$S_p = (1,1,1) (1,1,0) (1,0,1) (0,1,1) (1,1,1)$$

$$S_w = (1,0,0) (0,1,0) (0,0,1) (0,0,0) (1,0,0)$$

$$S_x = (1,0,1) (0,1,1) (0,1,0) (1,1,0) (1,0,1).$$

represents particular scheduling routines that are generated
 30 by the schedule generator for a three chamber serial trace.

Such schedules may contain a set of robot and chamber parameters that yield higher or lower throughput than other schedules in the set of all schedules. As such, the only way to determine an optimum schedule is to examine the
 35 throughput under all possible schedules and, using the optimization routine, determine which of the schedules is optimal.

As mentioned above, the 2^n binary n -tuples (position coordinates) are regarded as letters from the alphabet $\{0,1\}^n$. A finite string of letters is referred to as a word. For example, strings S_p , S_w , and S_x are all 5-letter words.

5 In this terminology, a partial schedule S of length k is a k -letter word $S(1)S(2)\dots S(k)$ in which next letter $S(i+1)$ depends only on the previous letter $S(i)$, $i=1,2,\dots,k-1$, and is built according to rules (s_1) , (s_2) , and (s_3) stated above. In accordance with these rules, all letters in a partial

10 schedule are different. A full schedule is a word $W(1)W(2)\dots W(n)$ such that $W(1)W(2)\dots W(n-1)$ is a partial schedule and $W(n)=W(1)$. For example, the word $W=(1,1,1)(1,1,0)(1,0,1)(0,1,1)$ is a partial schedule, where $W(1)=(1,1,1)$ and $W(4)=(0,1,1)$. (Generally, if $W=\bar{u}_1\bar{u}_2\dots\bar{u}_k$,

15 then $W(i)=\bar{u}_i$).

From the definition of a schedule, if $\bar{u}_1\bar{u}_2\dots\bar{u}_k$ is a partial schedule, then $\bar{u}_1\bar{u}_2\dots\bar{u}_k\bar{u}_{k+1}$ is also a schedule (partial or full) provided \bar{u}_{k+1} is obtained from \bar{u}_k according to rules (s_1) , (s_2) , and (s_3) . A given letter \bar{u}_k may have

20 anywhere from 1 to $[n/2]+1$ successors \bar{u}_{k+1} . The number of successors (variable nmb below) is easily determined by the following function:

```

25      function SerCount( $\bar{u}_k$ :letter): integer;
      var
        i,nmb:integer;
      begin
        nmb:=0
        for i:=1 to n-1
30          if  $\bar{u}_k[i]=1$  and  $\bar{u}_k[i+1]=0$ 
            then  $nmb:=nmb+1$ ;
         $nmb:=nmb+\bar{u}_k[n] + ((1+\bar{u}_k[1]) \text{ (mod } 2))$ 
        return (nmb)
35      end;
```

where $\text{SerCount}(\bar{u}_k)$ represents the number of successors of \bar{u}_k in a serial n -chamber trace. Since, in an exhaustive search, all the successors are examined, the foregoing pseudo-code determines the total number of successor letters

40 that must be computed to complete an exhaustive search.

Generating all $\text{SerCount}(\bar{u})$ successors of a given letter \bar{u} is not particularly difficult. As each successor of \bar{u} is generated, it is stored in a binary matrix Z that has $\text{SerCount}(\bar{u})$ rows and $(n+1)$ columns. The last column of Z is reserved for a Boolean variable that is set to true if the successor was used in a partial schedule and is set to false if the successor was not used. This entry is used later in the backtracking routine (discussed below with reference to FIG. 10) that generates all possible schedules for a given trace. The successors of a given letter are determined by the following function.

```

function SerGenerator( $\bar{u}$ :letter): matrix;
var
15   i:integer;
begin
    if  $\bar{u}[1] = 0$  then begin
        copy ( $\bar{u}, \bar{v}$ );
         $\bar{v}[1] = 1$ ;
20     store( $\bar{v}, Z$ );
    end;
    if  $\bar{u}[n] = 1$  then begin
        copy ( $\bar{u}, \bar{v}$ );
         $\bar{v}[n] = 0$ ;
25     store ( $\bar{v}, Z$ );
    end;
    for i:=1 to n-1
        if  $\bar{u}[i]=1$  and  $\bar{u}[i+1]=0$  then begin
            copy ( $\bar{u}, \bar{v}$ );
30              $\bar{v}[i]=0$ ;  $\bar{v}[i+1]:=1$ ;
            store ( $\bar{v}, Z$ );
        end;
    return (Z);
35 end;
```

There are two functions which are used repeatedly in the above pseudo-code. Function $\text{copy}(\bar{u}, \bar{v})$ returns letter \bar{u} that is a replica of letter \bar{v} . This manner of implementing rules (s_1) , (s_2) , and (s_3) , in which the routine first copies \bar{u} into \bar{v} and then modifies \bar{v} , is not inefficient because \bar{u} and \bar{v} differ in at most two coordinates. Function $\text{store}(\bar{v}, Z)$ copies letter \bar{v} into a proper row of matrix Z . Note that in the above module, the

routine copies a binary n -tuple twice; clearly, in implementation, the routine copies the successor of \bar{u} (slightly altered n -tuple \bar{u}) into the proper row of matrix Z directly.

- 5 Using the foregoing pseudo-code and given a letter \bar{u} in a serial trace, the pseudo-code generates all possible successor letters of \bar{u} and stores them in matrix Z . For example, in FIG. 7, given the letter $(0,0,0)$, the pseudo-code produces a string of valid successor letters, e.g., letters $(1,0,1)$, $(0,1,0)$, $(1,1,0)$, and $(0,0,0)$. Given a different initial letter, a different valid set of successors is produced, e.g., letter $(0,1,0)$ may produce letters $(1,1,0)$, $(1,0,1)$, $(1,0,0)$ and $(0,1,0)$.

15 C. Successor Generation for Mixed and Parallel Traces

The representation of an n -chamber mixed trace by a binary n -tuple is slightly more involved because exactly one chamber from a given stage is visited by a wafer and there are no wafer transfers within the stage. Thus, the schedule generation routine must recognize different stages as well as parallel chambers within a stage. FIG. 4 depicts an illustrative mixed trace containing four stages with six chambers, where chambers C_1 and C_4 are serial and chamber pairs $C_2(a)$, $C_2(b)$ and $C_3(a)$, $C_3(b)$ are parallel.

- 25 Without loss of generality, it is assumed that an n -chamber mixed trace is comprised of k successive stages, $F_1, F_2, \dots, F_k, k \leq n$. If $1, 2, \dots, n$ are positions in a binary n -tuple \bar{x} that corresponds to chambers C_1, C_2, \dots, C_n , respectively, then positions $1, 2, \dots, |F_1|$ corresponds to chambers in stage 1, positions $|F_1|+1, |F_1|+2, \dots, |F_1|+|F_2|$ correspond to chambers in stage 2, and so on. If chamber C_i belongs to stage F_t , then position i in the corresponding associated binary n -tuple \bar{x} belongs to F_t and $i \in F_t$ (while, in fact, i is one of the consecutive $|F_t|$ positions in \bar{x}).

- 35 In this representation, a schedule is a finite string of binary n -tuples which starts and ends with the same

binary n-tuple. This is the only repeated letter in the word. In addition, if \bar{v} is a successor of \bar{u} , then \bar{u} and \bar{v} differ in at most two coordinates and the following rules define the relationship of \bar{u} and \bar{v} :

5

m_1) If for some $i \in F_1$, $\bar{u}[i]=0$, then $\bar{v}[i]=1$. For all $k \neq i$, $\bar{v}[k]=\bar{u}[k]$ (This corresponds to a wafer being moved from the loadlock into stage 1.)

10

m_2) If for some $i \in F_k$, $\bar{u}[i]=1$, then $\bar{v}[i]=0$. For all $j \neq i$, $\bar{v}[j]=\bar{u}[j]$. (This corresponds to a wafer being moved from the last stage F_k into the loadlock).

m_3) If for some $i \in F_t$ and some $j \in F_{t+1}$, $\bar{u}[i]=1$ and $\bar{u}[j]=0$, then $\bar{v}[i]=0$ and $\bar{v}[j]=1$. For all $r \notin \{i, j\}$, $\bar{v}[r]=\bar{u}[r]$. (This corresponds to a wafer being moved from stage F_t into the next stage F_{t+1} .)

15

In determining the number of successors of a given letter \bar{u} , it will be handy to define a sequence $M_0=0$ and

20

$$M_i = |F_1| + |F_2| + \dots + |F_i|,$$

where $|F_i|$ is the size (number of chambers) of stage F_i . The above sequence reflects the partition of the index set of \bar{u} into stages. Clearly, $M_k=n$, where n is the number of chambers. The number of successors of \bar{u} is determined by the following function:

25

```

function MixCount( $\bar{u}$ :letter):integer;
var
  t, i, j, nmb:integer;
begin
  nmb:=0
  for i:=1 to  $M_1$ 
    if  $\bar{u}[i]=0$ 
      then nmb:=nmb+1
  for j:=1+ $M_{k-1}$  to  $M_k$ 
    if  $\bar{u}[i]=1$ 
      then nmb:=nmb+1
  for t:=1 to k-1

```

30

35

-16-

```

    for i:=1+Mt-1 to Mt
    for j:=1+Mt to Mt+1
      if  $\bar{u}[i]=1$  and  $\bar{u}[j]=0$ 
        then nmb:=nmb+1;
5   return (nmb)
end;
```

Obviously, if $M_t=t$ and $k=n$ in the above pseudo-code, then $\text{MixCount}(\bar{u})$ becomes $\text{SerCount}(\bar{u})$. Also, for a pure parallel n-chamber trace, due to $k=1$, the 3-nested "for" statements in the above pseudo-code are null; by joining the first two loops (since there is just one stage), the pseudo-code reduces to:

```

15   function ParCount( $\bar{u}$ :letter):integer;
      var
        i,nmb:integer;
      begin
        nmb:=0;
20   for i:=1 to n
        if  $\bar{u}[i]=0$  or  $\bar{u}[i]=1$ 
          then nmb:=nmb+1;
        return (nmb)
25   end;
```

which always returns $nmb = n$. Thus, in a pure parallel n-chamber trace, any given letter has n successors.

A function that generates and stores all successors of a given letter in a mixed trace is:

```

30   function MixGenerator( $\bar{u}$ :letter):matrix;
      var
        t,i,j:integer;
      begin
35   for i:=1 to M1
        if  $\bar{u}[i]=0$  then begin
          copy( $\bar{u}, \bar{v}$ );
           $\bar{v}[i]:=1$ ;
          store( $\bar{v}, Z$ )
40   end;
        for j:=1+Mk-1 to Mk
          if  $\bar{u}[j]=1$  then begin
            copy( $\bar{u}, \bar{v}$ );
             $\bar{v}[j]:=0$ ;
            store( $\bar{v}, Z$ )
45   end;
        for t:=1 to k-1
```

```

    for i:=1+Mt-1 to Mt
    for j:=1+Mt to Mt+1
        if  $\bar{u}[i]=1$  and  $\bar{u}[j]=0$  then begin
            copy ( $\bar{u}, \bar{v}$ );
5          $\bar{v}[i]:=0$ ;  $\bar{v}[j]:=1$ ;
            store( $\bar{v}, Z$ )
        end;
    return (Z);
10 end;
```

Functions *copy* (\bar{u}, \bar{v}) and *store* (\bar{v}, Z) are the same as in the corresponding routine for serial traces. (Note that this time matrix *Z* has MixCount \bar{u} rows and (n+1) columns.) Again, if $M_t=t$ and $k=n$ in the above function, then

15 MixGenerator(\bar{u}) becomes SerGenerator(\bar{u}). For pure parallel traces, due to $k=1$, a function that generates successors of a given letter \bar{u} is:

```

20 function ParGenerator( $\bar{u}$ :letter):matrix;
    var
        i:integer;
    begin
        for i:=1 to n
        begin
25             copy ( $\bar{u}, \bar{v}$ );
            if  $\bar{u}[i]=1$ 
            then  $\bar{v}[i]:=0$ 
            else  $\bar{v}[i]:=1$ 
            store ( $\bar{v}, Z$ )
30         end;
        return (Z)
    end;
```

Note the similarity between functions that count

35 successors and functions that generate successors. In fact, conditions for identifying a successor are identical in both types of function; the difference is what is performed once the condition is detected.

FIG. 8 depicts an illustrative schedule tree for a

40 3-chamber mixed trace, (e.g., $LL \rightarrow C_1 \rightarrow (C_2 \vee C_3) \rightarrow LL$), where the successors of a particular letter are determined using the MixGenerator(\bar{u}) pseudo-code. FIG. 8A depicts a schematic diagram of the trace of FIG. 8 having wafers positioned in position (1,1,0).

D. Successor Generation That Includes Robot Position

When the schedule generation routine includes robot movements, than to an n -chamber serial trace, comprised of chambers C_1, C_2, \dots, C_n , the routine must associate a $(n+1)$ -tuple from $\{0,1\}^n \times \{0,1,\dots,n\}$. If \bar{x} is such a tuple, then, for $i=1,2,\dots,n$, $\bar{x}[i]=0$, if chamber C_i is empty; and $\bar{x}[i]=1$, if C_i contains a wafer. Thus, as before, the first n coordinates of \bar{x} are from $\{0,1\}$. The robot position is described by the last coordinate of \bar{x} , i.e., x_n in the 3-tuple (x_1, x_2, x_3) , where x_1 and x_2 are wafer coordinates and x_3 is a robot coordinate. We set $\bar{x}[n+1]=k$ if (and only if) the robot is in a home position at chamber C_k . If $\bar{x}[n+1]=0$, the robot is positioned at the loadlock.

Let S_n represent the alphabet of the above association. For example, if $n=2$, then S_2 is comprised of twelve 3-tuples, namely,

$$S_2 = \{(0,0;0), (0,0;1), (0,0;2); (0,1;0), (0,1;1), (0,1;2); (1,0;0), (1,0;1), (1,0;2); (1,1;0), (1,1;1), (1,1;2)\}.$$

For an n -chamber serial trace, $|S_n|$ is the number of $(n+1)$ -tuples from $\{0,1\}^n \times \{0,1,\dots,n\}$ and thus $|S_n| = (n+1)2^n$. These $(n+1)$ -tuples are referred to as letters from the alphabet S_n . As before, a word is a finite string of letters from S_n . For example,

$$(0,0;0) (1,0;1) (0,1;2) (0,1;0) (1,1;1) (1,1;2) (1,0;0) (1,0;1)$$

is an 8-letter word. Note that a word may contain repeated letters. For example, abcdaxy is a word, but not a schedule.

In this representation, a schedule S is a word (a string of the above described $(n+1)$ -tuples),

$$S = \bar{x}\bar{z}\dots\bar{u}\bar{v}\dots\bar{y}\bar{x},$$

which starts and ends with the same letter and this is the only repeated letter. Furthermore, any two consecutive letters \bar{u} and \bar{v} (where \bar{v} is a successor of \bar{u}) differ in at most three coordinates and are related in accordance with the following rules:

- 10 a) If $\bar{u}[1]=0$ and $\bar{u}[n+1]=0$, then $\bar{v}[1]=1$ and $\bar{v}[n+1]=1$.
For all $i \notin \{1, n+1\}$, $\bar{v}[i]=\bar{u}[i]$. (This correspondence to a wafer being moved from the loadlock to C_1 .)
- b) If $\bar{u}[n]=1$ and $\bar{u}[n+1]=n$, then $\bar{v}[n]=0$ and $\bar{v}[n+1]=0$.
For all $i \notin \{n, n+1\}$, $\bar{v}[i]=\bar{u}[i]$. (This corresponds to a wafer being moved from C_n into the loadlock.)
- 15 c) If for some $r \notin \{0, n\}$, $\bar{u}[r]=1$ and $\bar{u}[r+1]=0$ and $\bar{u}[n+1]=r$, then $\bar{v}[r]=0$ and $\bar{v}[r+1]=1$ and $\bar{v}[n+1]=r+1$.
For all $i \notin \{r, r+1, n+1\}$, $\bar{v}[i]=\bar{u}[i]$. (This corresponds to a wafer being moved from C_k into $C_{(k+1)}$, where neither C_k nor $C_{(k+1)}$ is a loadlock.)
- 20 d) If $\bar{u}[1]=0$ and $\bar{u}[n+1]=j$ where $j \neq 0$, then $\bar{v}[n+1]=0$.
For all $i \neq n+1$, $\bar{v}[i]=\bar{u}[i]$. (This corresponds to a robot moving from home position at C_j to a home position at a loadlock in preparation for a wafer moving from the loadlock into C_1 .)
- 25 e) If $\bar{u}[n]=1$ and $\bar{u}[n+1]=j$ where $j \neq n$, then $\bar{v}[n+1]=n$.
For all $i \neq n+1$, $\bar{v}[i]=\bar{u}[i]$. (This corresponds to a robot moving from a home position at C_j to a home position at C_n in preparation for a wafer move from C_n into loadlock.)
- 30 f) If for some $r \notin \{0, n\}$, $\bar{u}[r]=1$ and $\bar{u}[r+1]=0$ and $\bar{u}[n+1]=j$ where $j \neq r$, then $\bar{v}[n+1]=r$. For all $i \neq n+1$, $\bar{v}[i]=\bar{u}[i]$. (This corresponds to a robot moving

from a home position at C_j to a home position at C_r in preparation for a wafer moving from C_r into C_{r+1} ; C_0 represents the loadlock.)

5 Note that rules (a), (b), and (c) above are, in fact rules (s_1) , (s_2) , and (s_3) , respectively, when the robot is already prepositioned to move a wafer, while (d), (e), and (f) correspond to prepositioning the robot for moves defined by rules (a), (b), and (c), respectively.

10 A routine that calculates the number of successors of a given letter as well as finds and stores these successors is designed in a similar manner as in the previous cases for mixed and serial traces (this time by following the steps (a) through (f)). In such a routine, the number of
15 successors is considerably large because, every time a wafer transfer is possible (e.g., $\bar{u}[i]=0$ or $\bar{u}[n]=1$ or $\bar{u}[i]=1$ and $\bar{u}[i+1]=0$, a robot may have to be prepositioned (e.g., from any of the $n-1$ positions $j \neq 0$ or $j \neq n$ or $j \neq i$). To achieve routines for determining the number of successors and the
20 successors themselves that includes robot position, the new functions used are modifications of $\text{SerCount}(\bar{u})$ and $\text{SerGenerator}(\bar{u})$ (or $\text{MixCount}(\bar{u})$ and $\text{MixGenerator}(\bar{u})$). Given the foregoing description of $\text{SerCount}(\bar{u})$, $\text{SerGenerator}(\bar{u})$, $\text{MixCount}(\bar{u})$ and $\text{MixGenerator}(\bar{u})$, a person skilled in the
25 art could readily modify these functions to account for robot position using the aforementioned rules (a)-(f).

E. Generating Schedules From A Trace Using a Backtracking Technique

30 Backtracking algorithms use special problem-tailored techniques to systematically explore implicitly directed graphs (usually trees). Such algorithms are well known in the art. In the schedule generation routine, a backtracking algorithm is used in conjunction with one or more of the
35 previously discussed successor generation routines (e.g., $\text{SerGenerator}(\bar{u})$ or $\text{MixGenerator}(\bar{u})$) to produce every possible schedule given a particular trace.

Let \bar{u}_1 be the starting letter of a schedule. By using the rules for adding a successor letter as discussed in Sections B, C or D above, the foregoing routines build a partial schedule, say $S = \bar{u}_1 \bar{u}_2 \dots \bar{u}_k$. There are two questions to answer every time a new letter \bar{u}_{k+1} is added to partial trace S:

- a) Is $\bar{u}_1 \bar{u}_2 \dots \bar{u}_k \bar{u}_{k+1}$ a full schedule?
- b) If $\bar{u}_1 \bar{u}_2 \dots \bar{u}_k \bar{u}_{k+1}$ is a full schedule, are there other full schedules which have not been recorded?

10

A word $\bar{u}_1 \bar{u}_2 \dots \bar{u}_{k+1}$ is recognized as a full schedule if it is built according to rules for successor letters and if there exists an index $i < k+1$ such that $\bar{u}_i = \bar{u}_{k+1}$ and all letters $\bar{u}_1 \bar{u}_2 \dots \bar{u}_k$ are different. Thus, to determine a full schedule a routine checks whether or not

$$\bar{u}_{k+1} \neq \bar{u}_i, \quad i = 1, 2, \dots, k,$$

for every newly appended letter \bar{u}_{k+1} which is a proper successor of \bar{u}_k .

Once it is found that $\bar{u}_i = \bar{u}_{k+1}$ for some $i < k+1$, the routine either prints or stores the full schedule $\bar{u}_i \bar{u}_{i+1} \dots \bar{u}_{k+1}$. To find other schedules, the routine removes \bar{u}_{k+1} from the full schedule S and looks at some other unused successor of \bar{u}_k . If there is such a successor, say letter \bar{z} , the routine checks if $\bar{u}_1 \dots \bar{u}_k \bar{z}$ is a full schedule. If $\bar{u}_1 \dots \bar{u}_k \bar{z}$ is not a full schedule, the routine looks at unused successors of \bar{z} and so on. If $\bar{u}_1 \dots \bar{u}_k \bar{z}$ is a full schedule, the routine removes \bar{z} and looks at another unused successor of \bar{u}_k . If there are no unused successors of \bar{u}_k , the routine goes back (backtrack) and looks at unused successors of \bar{u}_{k-1} and so on, until the routine returns to the starting letter \bar{u}_1 . Basically, the routine contains the following sequence of steps:

30

1. (Initialize.) Choose the letter \bar{u}_1 of a schedule and go to Step 2.
2. If schedule $\bar{u}_1\bar{u}_2 \dots \bar{u}_k$ is not complete, go to step 3. Else, go to Step 4.
- 5 3. Find a successor letter (of the last letter \bar{u}_k , in the schedule) which was not used, append it to the partial schedule and go to Step 2. If there are no unused successors, go to step 5.
4. Print or store the schedule and go to Step 5.
- 10 5. If there are no more schedules, then STOP. Else, go to Step 6.
6. (Backtrack.) Remove the last letter from the complete schedule and go to Step 3.

15 Clearly, the routine must ensure that it does not print (store) duplicate schedules in Step 4 as well as that the routine has printed (stored) all possible schedules. The former is accomplished in Step 3 where the routine appends only an unused successor of the last letter to the partial
 20 schedule. The latter is ensured by a proper termination condition (for example, the routine is at \bar{u}_1 (the initial letter) and there are no unused successors). It is convenient to choose the first letter \bar{u}_1 so that it has only one successor, e.g., $\bar{u}_1 = \bar{0}$ or $\bar{u}_1 = \bar{e}_1$, where \bar{e}_k is the k-th
 25 column (row) of an n by n identity matrix.

For example, as illustrated in Fig. 9, starting with letter $\bar{0}$, the routine builds a tree whose nodes are letters. If \bar{x} is such a node, the children of \bar{x} are successors of a letter \bar{x} and, for serial traces, there are exactly
 30 SerCount(\bar{x}) of the successors. As such, the routine produces $\bar{0}$, $\bar{0}\bar{e}_1$ and $\bar{0}\bar{e}_1\bar{e}_2$ as successive partial schedules. (The word $\bar{0}\bar{e}_1\bar{e}_2$ is a directed path from node $\bar{0}$ to node \bar{e}_2 .) Since $\bar{e}_1 + \bar{e}_2$ and \bar{e}_3 are successors (children) of \bar{e}_2 , words $\bar{0}\bar{e}_1\bar{e}_2(\bar{e}_1 + \bar{e}_2)$ and $\bar{0}\bar{e}_1\bar{e}_2\bar{e}_3$ are partial schedules as well.
 35 Now, \bar{e}_3 has two successors ($\bar{e}_1 + \bar{e}_3$ and \bar{e}_4), while $\bar{e}_1 + \bar{e}_2$ has

only one successor ($\bar{e}_1 + \bar{e}_3$). Hence, $\bar{0}\bar{e}_1\bar{e}_2(\bar{e}_1 + \bar{e}_2)(\bar{e}_1 + \bar{e}_3)$ and $\bar{0}\bar{e}_1\bar{e}_2\bar{e}_3(\bar{e}_1 + \bar{e}_3)$ and $\bar{0}\bar{e}_1\bar{e}_2\bar{e}_3\bar{e}_4$ are all partial schedules and so on.

As mentioned previously, letters comprising a given word (or partial schedule) S are distinguished by their positions; so $S(1)$ is the first letter in S , $S(2)$ is the second, and so on. The level of a search tree is denoted by L this is also the length of a partial schedule. Partial schedules of length L are thus paths of length L in a search tree. Function $\text{scnt}(\bar{x})$ returns the number of successors of \bar{x} . As such $\text{scnt}(\bar{x})$ is either $\text{SerCount}(\bar{x})$ or $\text{MixCount}(\bar{x})$ or either of these for a model which includes robot movements. If S is a partial schedule of length L , then $S+w$ or Sw is a partial schedule of length $L+1$ and $S(L+1)=w$. Similarly, if length of S is L and $S(L)=w$, then $S-w$ has length $L-1$ (in short, $+$ means append a letter and $-$ means remove a letter).

Finally, a commitment to data organization (structure) is necessary in an efficiently designed routine. Keep in mind that the number of chambers (and thus the number of successors of a given word) is relatively small. Thus, it does not make any difference if the routine generates all successors of a given letter and stores them, as opposed to dynamically generating the successors one-by-one as the need arises.

A basic schedule generator routine can be summarized by the following five steps:

1. Initialize the schedule: $S \leftarrow \bar{0}$ and $L \leftarrow 1$ and go to Step 2.
2. $\bar{x} \leftarrow S(L)$ and $\delta \leftarrow \text{cnt}(\bar{x})$. Store δ successors of \bar{x} , $\bar{y}_1, \bar{y}_2, \dots, \bar{y}_\delta$, and mark them unused. Go to Step 3.
3. $S \leftarrow S + \bar{y}_1$ and $L \leftarrow L+1$ and $\delta \leftarrow \delta-1$. Mark \bar{y}_1 used and go to Step 4.
4. Compare $S(L)$ with $S(1), S(2), \dots, S(L-1)$, respectively. If $S(i)=S(L)$ for some $i < L$, print S and L and go to Step 5; else, go to Step 2.

5. $S \leftarrow S - S(L)$ and $L \leftarrow L - 1$. If $L = 1$, STOP; else, go to Step 6.
6. If $\delta = 0$, go to Step 5. Else ($\delta > 0$), append an unused successor of $S(L)$ to S , mark it used, $\delta \leftarrow \delta - 1$, and go to Step 2.

In step 1, the routine initializes the schedule, S , and the level of the search tree, L . Clearly, L must be initialized to 1. As for the initial letter in schedule S , for convenience, the routine uses a letter that has only one successor. A letter $\bar{0}$ corresponds to a situation in which all chambers are empty (i.e., the tool has just begun processing wafers).

In step 2, the routine first finds the number of successors, δ , of the last letter, say \bar{x} , in a partial schedule S (clearly, $\bar{x} = S(1)$). Function $\text{cnt}(\bar{x})$ returns the number of successors of a given letter \bar{x} . Then, by using the rules which determine the successor of a given letter, the routine finds, stores and marks unused successors of \bar{x} . As a result, a successor may be a record with two fields: the first field is the actual letter, while the second field is a Boolean variable with value true if the successor was not used in a particular partial schedule S and value false otherwise. (Or the routine may use a matrix representation for the list of successors as described in Sections C and D above.)

In step 3, one of the unused successors of the last letter \bar{x} is appended to the partial schedule S , the length of schedule L is increased by 1 and the number of unused successors of \bar{x} is decreased by 1. (There will always be at least one successor to any given letter.)

In step 4, the routine checks if S is a full schedule by comparing the newly added (the last) letter $S(L)$ with all previous letters $S(1), S(2), \dots, S(L-1)$. (That should be accomplished every time a new letter is appended to a partial schedule.) If $S(L)$ is a repeated letter, the

routine prints (stores) the schedule; else, the routine continues with building the schedule.

When a partial schedule becomes a full schedule, $S(1)S(2)\dots S(L)$, after storing the schedule, the routine
5 removes the last letter $S(L)$ and look for some other unused successor of $S(L-1)$. If there are some unused successors, the routine appends a successor to the partial schedule, finds its successors, appends one of these successors and so on. If there are no successors, the routine removes $S(L-1)$
10 from S and looks for unused successors of $S(L-2)$ and so on. The program terminates when $L=1$ and $\delta=0$ (meaning there are no unused successors of the first letter).

The routine above is valid for any representation of the scheduling problem. That is, either serial or mixed
15 traces with letters from $\{0,1\}^n$ or either of these traces with robot position being part of the model (and thus alphabet from $\{0,1\}^n \times \{0,1,\dots,n\}$). Clearly, functions that count and generate successors of a given letter are different each time.

20 Fig. 10 depicts a flow diagram of a schedule generation routine 1000 that operates as generally discussed above. The routine 1000 begins at step 1002 by initializing the schedule, e.g., setting an initial letter to an n -tuple (n -string) of zeros. At step 1004, the routine finds,
25 stores and marks all unused successors of the last letter in a partial schedule. The successor letters are determined using the pseudo-code routines SerGenerator, ParGenerator and MixGenerator and the number of successor letters for each letter is determined using SerCount, ParCount and
30 MixCount. Of course, as mentioned above, if the robot position is to be taken into account, these pseudo-code routines must be appropriately modified to accommodate the expanded letters and the modify rules of successor generation.

35 Then, at step 1006, the routine appends an unused successor of the last letter to a partial schedule as well as increases the length of the schedule by one and decreases the number of unused successors by one. The routine

queries, at step 1008, whether the last letter of the partial trace has been reached. If the query is negatively answered, the routine proceeds along the NO path to step 1004. If the query is affirmatively answered, the routine proceeds to step 1010 where the schedule is either printed or stored.

Steps 1012, 1014, 1016 and 1018 represent a backtracking process. At step 1012, the routine removes the last letter of the schedule to produce a partial schedule and reduce the schedule length by one. Then, at step 1014, the routine queries whether the length of schedule is one. If the query is affirmatively answered, the routine stops at step 1016. However, if the query is negatively answered, the routine proceeds to step 1018. At step 1018, the routine queries whether there is an unused successor to the last letter. If the query is negatively answered, the routine proceeds along the NO path to step 1012. Otherwise, the routine proceeds to step 1020 where an unused successor is appended to the partial schedule. The routine then returns to step 1004.

Once all possible schedules are determined and stored in memory, the schedules are processed by a conventional throughput model. Specifically, each schedule is used by the model to predict a throughput for that schedule. The throughputs for all the schedules are compared to find the schedule having the highest (best) throughput. The schedule with the highest throughput is deemed optimal and is used to control the sequencer. The throughput model may be executed upon the sequencer computer or, more likely, it is executed on a remote computer, and the optimal schedule is downloaded to the sequencer.

The present invention rapidly computes all possible schedules for a given cluster tool configuration. The schedules are then executed by a conventional throughput model to determine the optimal schedule. As such, the present invention facilitates automatic determination of an optimal schedule in a rapid and accurate manner that has heretofore been unavailable in the prior art.

Although various embodiments which incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many of the varied embodiments that still
5 incorporate these teachings.

What is claimed is:

1. A method of producing schedules for processing a wafer
5 in a multichamber semiconductor wafer processing tool
comprising the steps of:
 - (a) providing a trace defining a series of chambers
that are visited by a wafer as the wafer is processed by the
tool;
 - 10 (b) initializing a sequence generator with an initial
value of a variable defining an initial wafer positioning
with the tool; and
 - (c) generating values of said variable that represent
all valid successor wafer positions related to the initial
15 value, where said values of said variable, taken together,
form a partial schedule for processing a wafer.
2. The method of claim 1 further comprising a step of
computing a total number of variable values generated from a
20 given variable value.
3. The method of claim 1 further comprising the steps of:
 - (d) backtracking through said series of variable values
in said partial schedule and applying step (c) to each value
25 in said partial schedule to produce further values of said
variable representing additional series of values that
represent additional partial schedules; and
 - (e) stopping said backtracking when all possible
variable value combinations are produced that represent all
30 possible valid schedules for said trace.
4. The method of claim 1 wherein a value of said variable
is a letter and a plurality of letters forms a word.
- 35 5. The method of claim 4 wherein a valid schedule is
defined by a word having no more than one repeated letter.

6. The method of claim 4 wherein each letter contains a n-tuple, where n represents a total number of wafer positions within said trace.
- 5 7. The method of claim 6 wherein n represents a total number of wafer positions within said trace plus a transport robot position.
8. The method of claim 3 further comprising the step of:
- 10 (f) identifying at least one schedule in all possible valid schedules that provides an optimal throughput for the trace.
9. The method of claim 8 wherein said identifying step (f) further comprises the step of computing the throughput for each and every schedule of said all possible schedules and selecting an optimum schedule for the trace which produces the highest throughput.
- 15 10. The method of claim 3 wherein said backtracking step (d) further comprises the steps of:
- (a') initializing a schedule to an n-string of zeros having a length of one;
- (b') identifying all unused successors of a last letter
- 25 in a partial schedule;
- (c') appending an unused successor to said partial schedule;
- (d') increasing the length of the partial schedule by one and decreasing a number of unused successors by one;
- 30 (e') querying whether the last letter of the partial schedule is the same as a previous letter in the partial schedule and, if not, repeat steps (b'), (c'), (d') and (e') until the last letter of the partial schedule is the same as a previous letter in the partial schedule;
- 35 (f') storing the partial schedule as a full schedule and storing the length of the full schedule;
- (g') removing the last letter of the full schedule to produce a new partial schedule and decreasing the length of the full schedule by one;

(h') querying whether the length of the new partial schedule is one and, if the length is one, stopping; otherwise, proceeding to step (i');

(i') querying whether there is an unused successor of the last letter and, if there are no unused successors of the last letter, repeating steps (g'), (h') and (i') until there is an unused successor of the last letter;

(j') appending the unused successor to the new partial schedule, marking the successor as used and decreasing the number of successors by one; and

(k') returning to step (b').

11. The method of claim 1 wherein successor variables values are defined by successor generation rules that are prescribed by wafer processing parameters.

12. The method of claim 1 wherein successor variable values are generated with regard to transport robot positioning.

13. Apparatus for producing schedules for processing a wafer in a multichamber semiconductor wafer processing tool, having a trace defining a series of chambers that are visited by a wafer as the wafer is processed by the tool, said apparatus comprising:

a sequence generator, being initialized with an initial value of a variable defining an initial wafer positioning within the tool, for generating values of said variable that represent all valid successor wafer positions related to the initial value, where said values of said variable, taken together, form a partial schedule for processing a wafer.

14. The apparatus of claim 13 further comprising means for computing a total number of successor variable values generated from a given variable value.

15. The apparatus of claim 13 further comprising:
means for backtracking through said series of variable values in said partial sequence and selecting each value in said partial schedule as an input to said sequence generator

which produces further values of said variable representing additional series of values that represent additional partial schedules, whereby all possible schedules for said trace are generated.

5

16. The apparatus of claim 15 further comprising a throughput model, coupled to said sequence generator, for computing a throughput value for each possible schedule in said all possible schedules.

10

17. The apparatus of claim 16 further comprising means for identifying at least one schedule that has the largest throughput value.

15 18. A schedule data structure, stored in a computer readable storage medium, of a schedule for processing a wafer in a multichamber semiconductor wafer processing tool comprising:

20 a plurality of n-tuples, where n is a total number of possible wafer positions, and the plurality of n-tuples contains only one duplicate n-tuple.

19. The schedule data structure of claim 18 wherein n is a total number of possible wafer positions plus a position of
25 transport robot position.

20. The schedule data structure of claim 18 wherein the n-tuple has a form $(x_1, x_2, x_3, \dots, x_n)$, where x defines the contents of a particular chamber at a particular point in a
30 schedule and x has a value 0 when a wafer is not positioned in the chamber and a value of 1 when a wafer is positioned in the chamber.

1/8

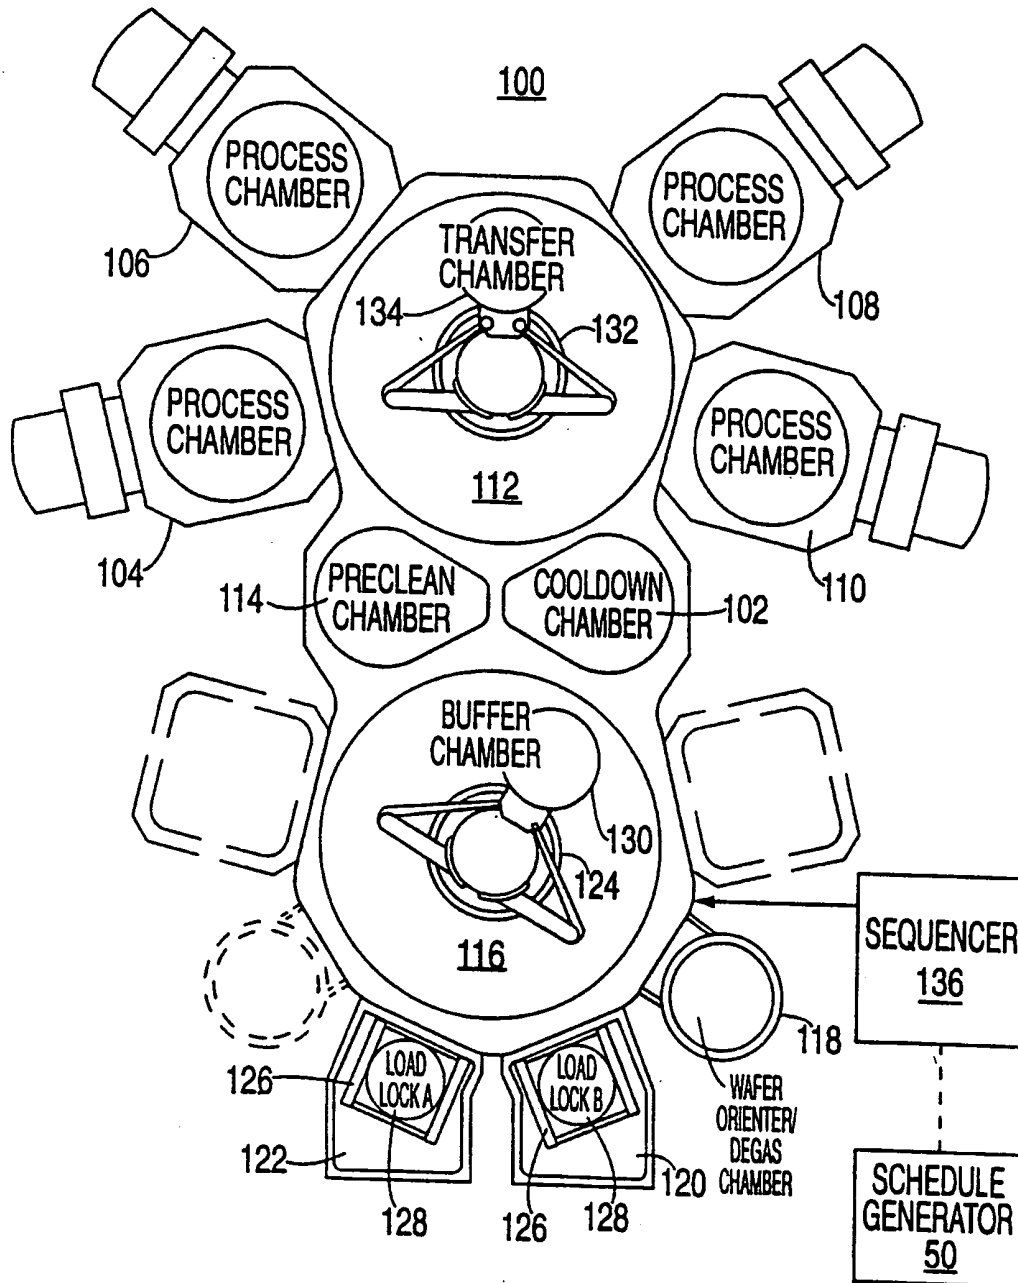


FIG. 1

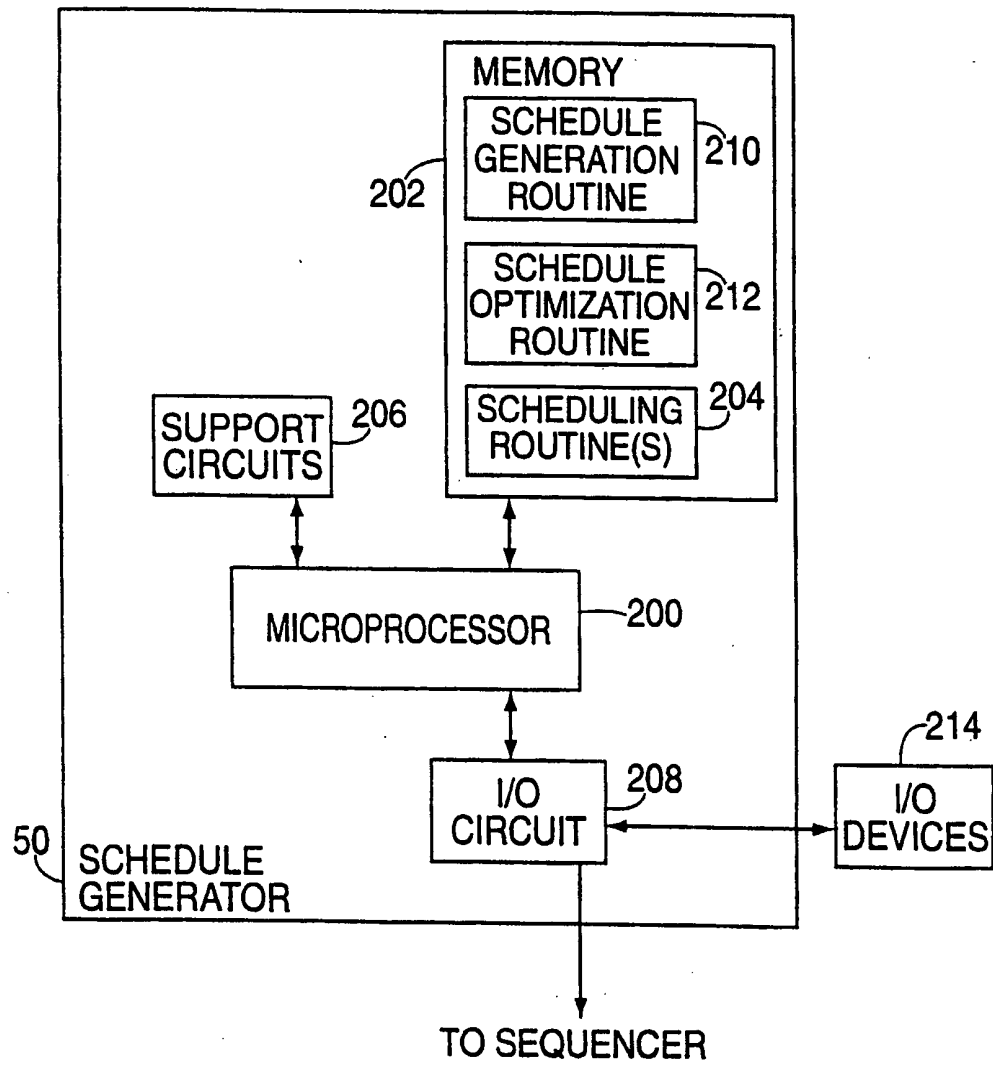


FIG. 2




FIG. 3

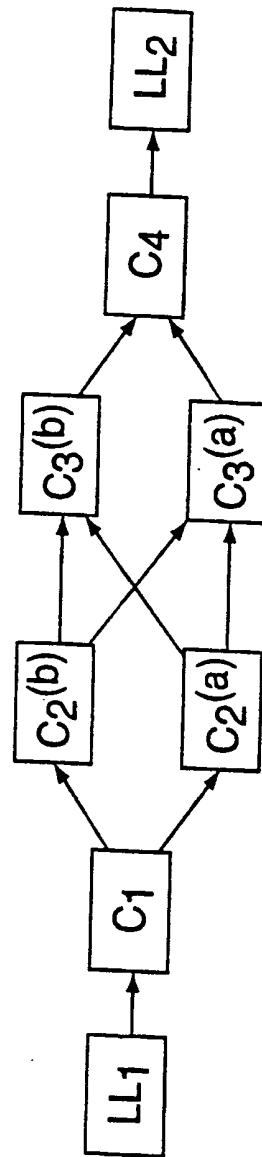


FIG. 4

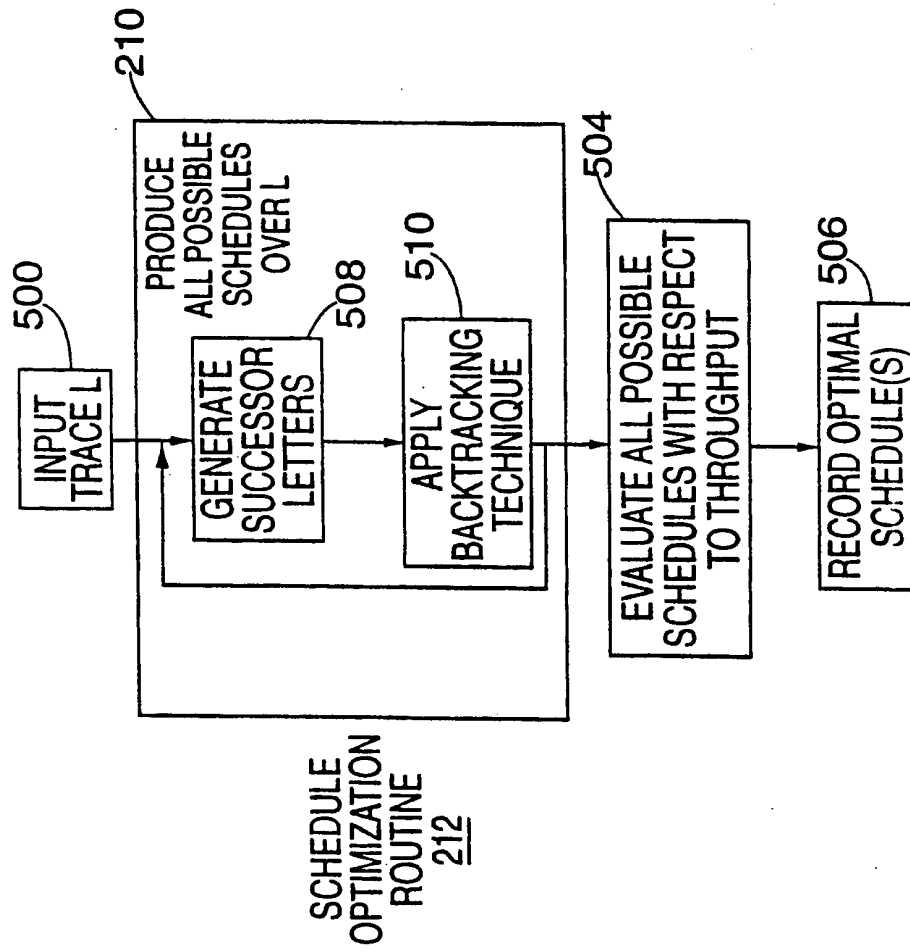


FIG. 5

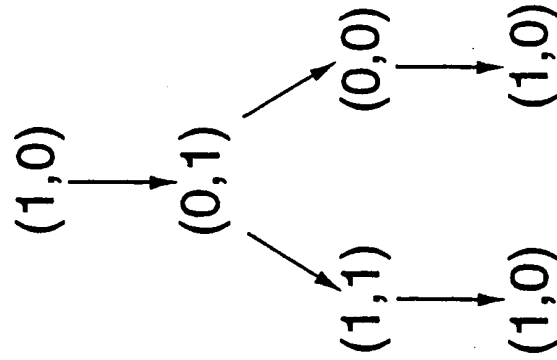


FIG. 6

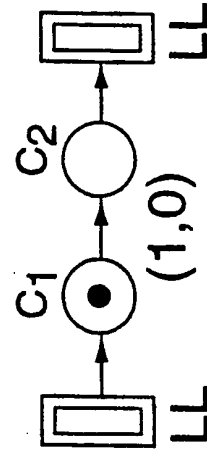


FIG. 6A

5/8

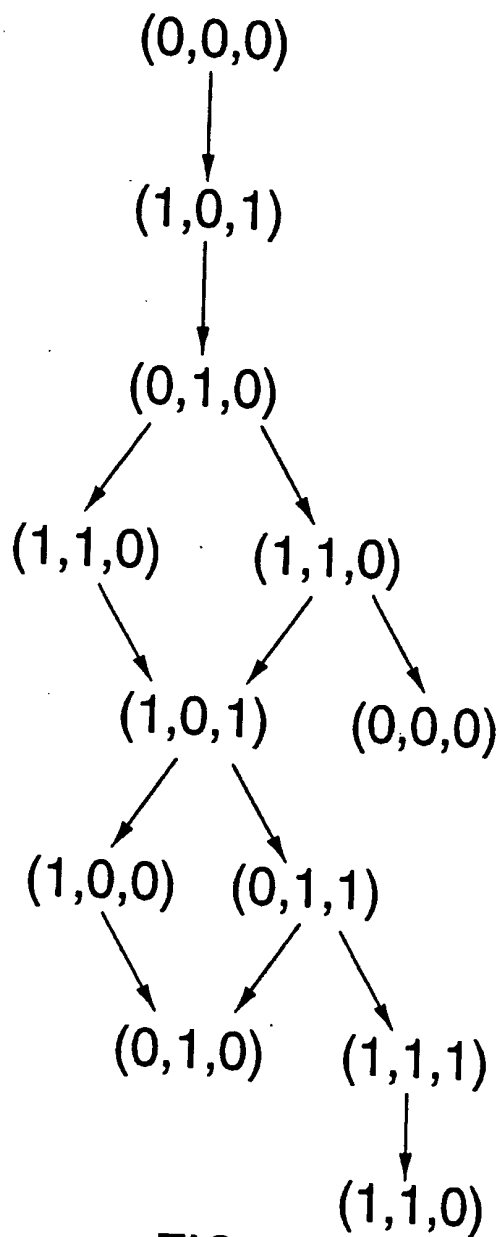


FIG. 7

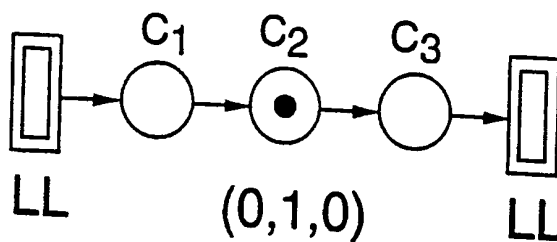


FIG. 7A

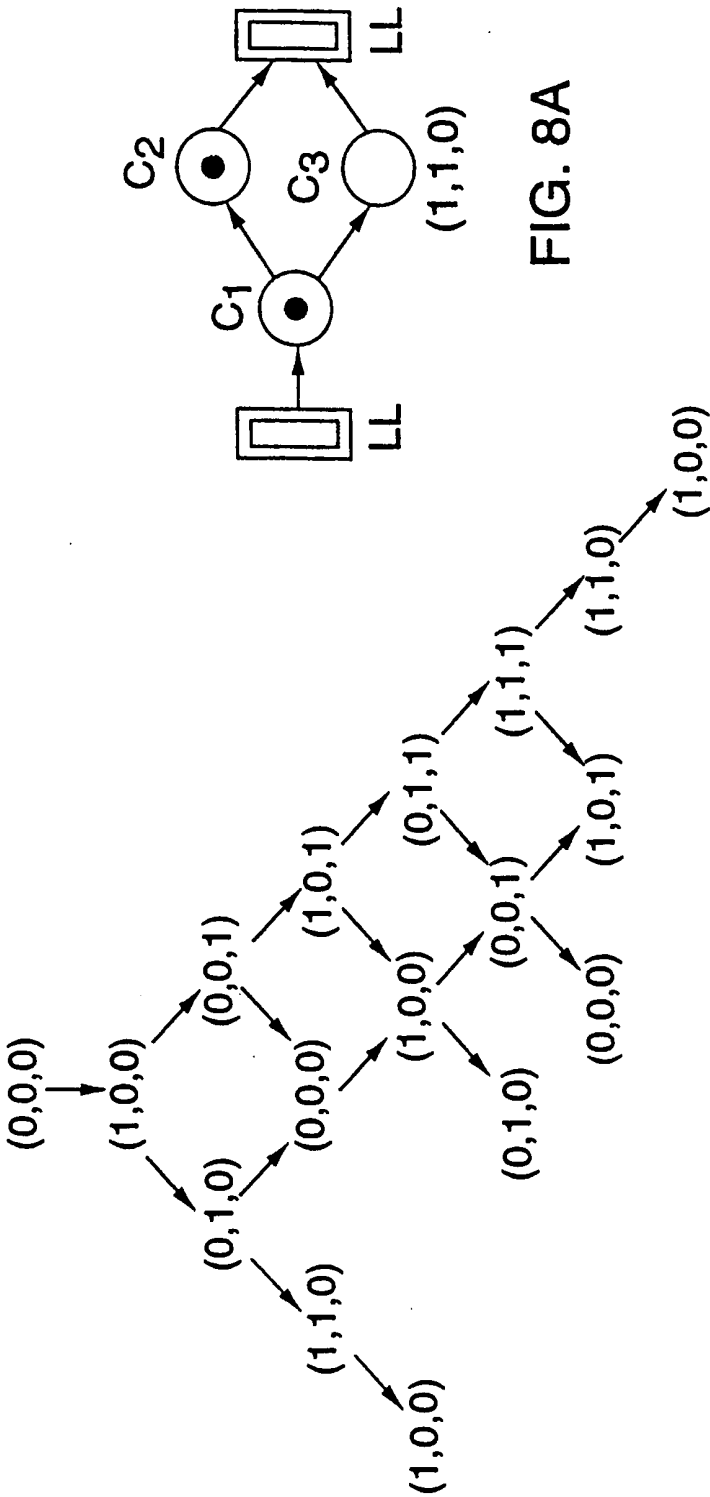


FIG. 8A

FIG. 8

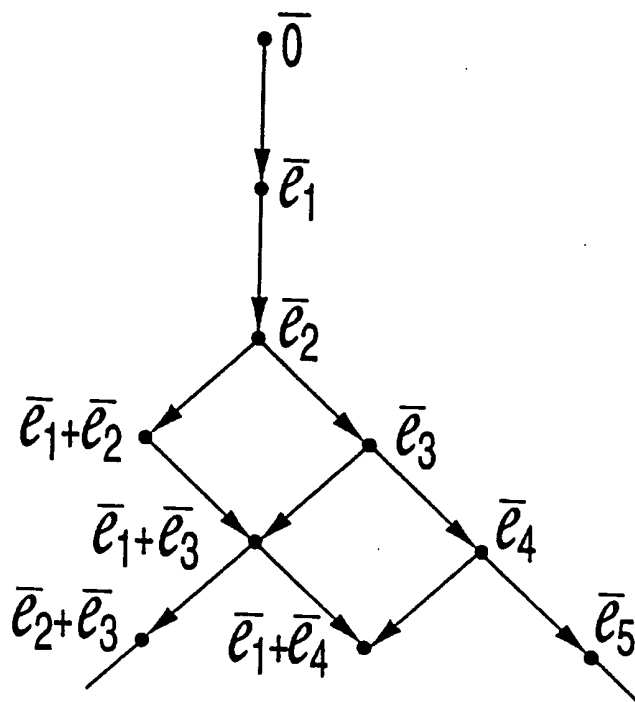


FIG. 9

8/8

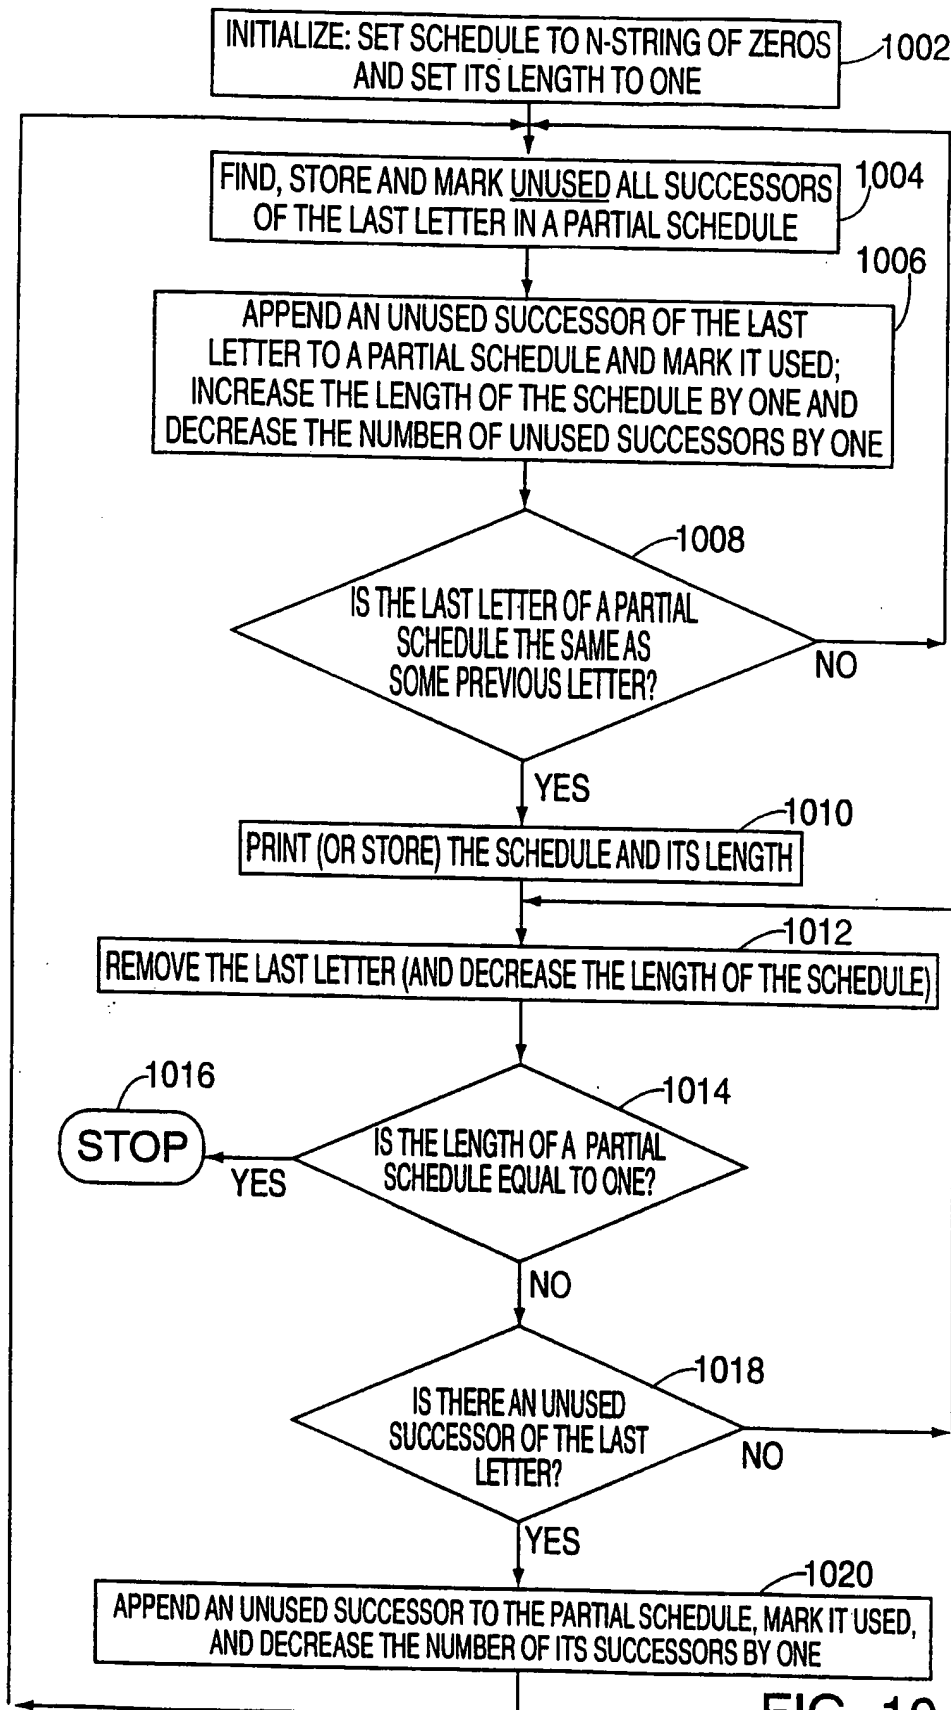


FIG. 10

INTERNATIONAL SEARCH REPORT

In tional Application No

PCT/US 98/11320

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H01L21/00 G05B19/418

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01L G05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 896 269 A (TONG) 23 January 1990 see the whole document ---	1, 13, 18
A	PATENT ABSTRACTS OF JAPAN vol. 96, no. 2, 29 February 1996 & JP 07 283093 A (TOKYO ELECTRON LTD), 27 October 1995 see abstract ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 96, no. 1, 31 January 1996 & JP 07 237095 A (HITACHI LTD), 12 September 1995 see abstract -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 October 1998

Date of mailing of the international search report

15/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bolder, G

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/11320

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4896269 A	23-01-1990	NONE	

THIS PAGE BLANK (USPTO)